



<http://www.navi-tuner.com>

# NT-AIO

Multimedia Interface



for

## Car model:

Which been built with the



## Panasonic

86140-02080  
Infotainment System

### Contents

1. Multimedia Interface x1
2. Main+CCD cable x1
3. LVDS cable x1
4. AV cable x1



1. Multimedia Interface



2. Main+CCD cable




3. LVDS cable



4. AV cable

### Cables' connection

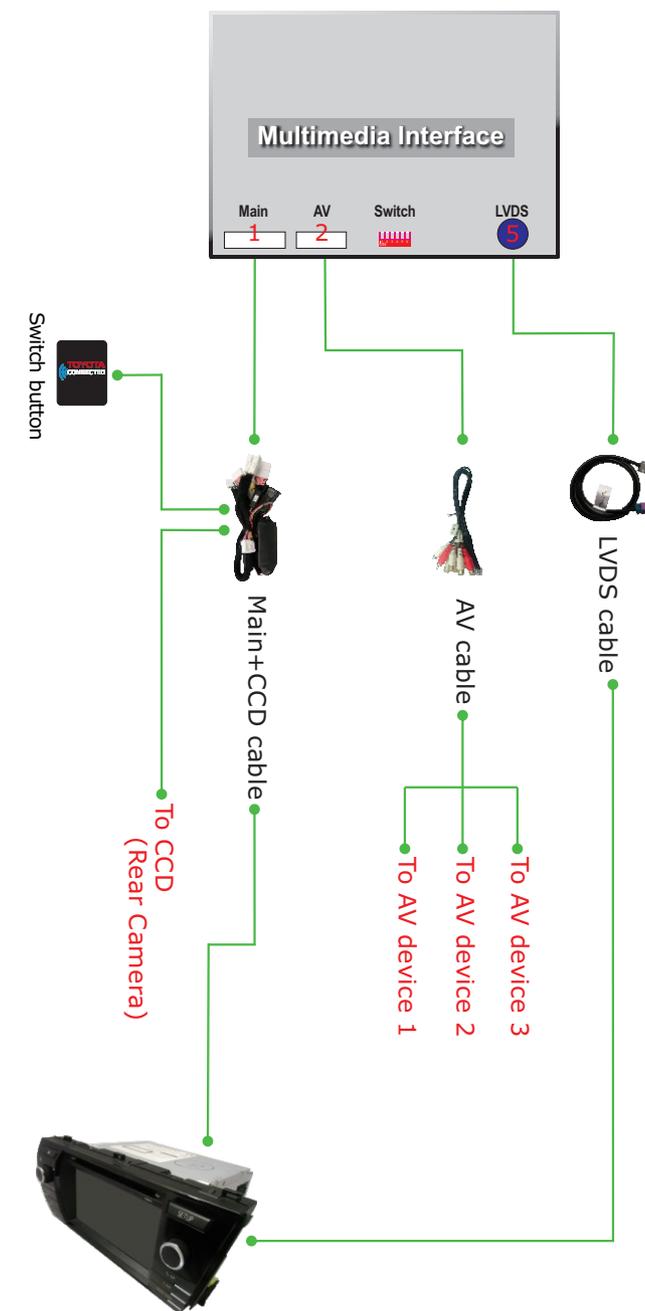

**Panasonic**  
86140-02080  
Infotainment System

## Switch Setting



No.	Position & Function
1	Reserve
2	Reserve
3	Reserve
4	Reserve
5	Reserve
6	Reserve

## Interface Setup(Auto detected)

### Step 1: Input devices of AV signal to interface.


- 1.Plug the devices(DTV/DVD....etc.) of AV output cables to the enclosed AV cables, then plug the AV cables to interface of AV1/AV2/AV3 ports.
- 2.The interface always auto detects the installed devices, need not to go the setup processing.

### Step 2: Original/NAVI-TUNER mode of switching.



- 1.Power on the infotainment system, display would show out the original mode of frame.
- 2.Press "**TOYOTA CONNECTED**" switch button, display should switch from original mode to NAVI-TUNER mode of Main page frame.
- 3.Under NAVI-TUNER mode, press original "**MEDIA**", "**SETUP**", "**☰**", "**CAR**", "**MAP/NAV**" buttons, the display should switch to original mode of corresponding page frame.

### Step 3: Channels switching sequence.

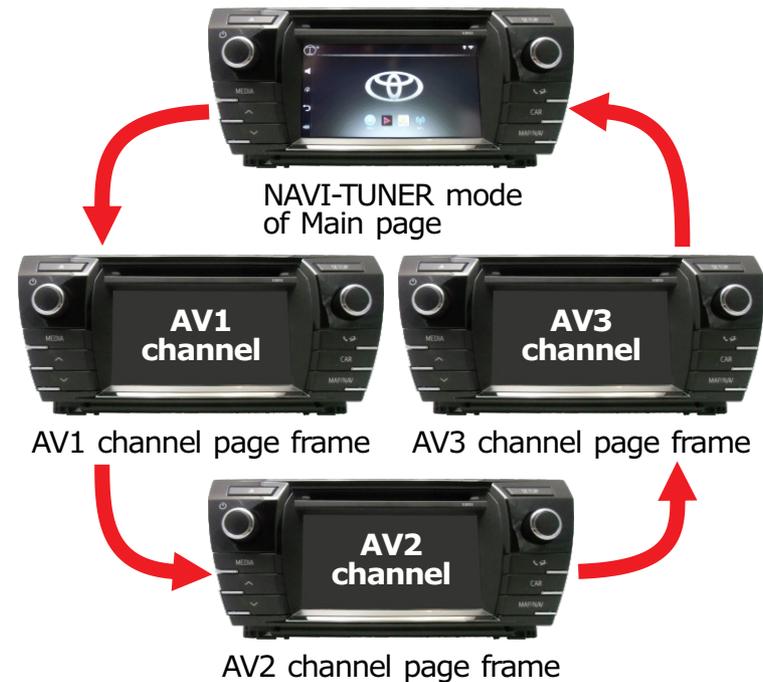

- 3.If other device(s) has been installed, under NAVI-TUNER mode of Main page frame, press "**TOYOTA CONNECTED**" switch button again, display would be switched to next channel of page frame.
- 4.The channel switching sequence is

→ Main -> AV1 -> AV2 -> AV3 ->

- example, if only one device been installed and plugged to interface of AV3 port, the channel switching sequence is → Main -> AV3 ->

## Final Test

- 1.Power off the vehicle, then power on the vehicle.
- 2.Power on the infotainment system.
- 3.Press "**TOYOTA CONNECTED**" switch button, display should switch from original mode to NAVI-TUNER mode of Main page frame.
- 4.Under NAVI-TUNER mode, press original "**MEDIA**", "**SETUP**", "**☰**", "**CAR**", "**MAP/NAV**" buttons, the display should switch to original mode of corresponding page frame.
- 5.If other device(s) has been installed, under NAVI-TUNER mode of Main page frame, press "**TOYOTA CONNECTED**" switch button again, display would be switched to next channel of page frame. The channel switching sequence is  
→ Main -> AV1 -> AV2 -> AV3 ->
- 6.Anytime, in "**R**" gear, display should switch to Rear Camera channel. After reversing done(out"**R**"gear), display should automatically switch back to the previous frame before reversing.
- 7.If the test is NG, please check if all the power & signal cables have been connected properly, then go the final test again.
- 8.If the test is still NG after done item 7, maybe the device(s) or interface is NG, please change another good device(s) or interface, then go the **whole installing** again.

## Installation is completed

**Congratulations**, the installation is completed.